

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G11B 27/32, 20/12, 27/10		A1	(11) International Publication Number: WO 00/14743
			(43) International Publication Date: 16 March 2000 (16.03.00)
(21) International Application Number: PCT/EP99/06254		(81) Designated States: AL, AM, AU, AZ, BA, BB, BG, BR, BY, CA, CN, CU, CZ, EE, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, RO, RU, SD, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 26 August 1999 (26.08.99)			
(30) Priority Data: 98250315.3 7 September 1998 (07.09.98) EP 98250387.2 4 November 1998 (04.11.98) EP			
(71) Applicant (for all designated States except US): DEUTSCHE THOMSON-BRANDT GMBH [DE/DE]; Hermann-Schwer-Strasse 3, D-78048 Villingen-Schwenningen (DE).		Published With international search report.	
(72) Inventors; and (75) Inventors/Applicants (for US only): SCHILLER, Harald [DE/DE]; Apfelgarten 11, D-30539 Hannover (DE). KEESEN, Heinz-Werner [DE/DE]; Siemensstrasse 22, D-30173 Hannover (DE). WINTER, Marco [DE/DE]; Böhmerstrasse 17, D-30173 Hannover (DE).			
(74) Agent: HARTNACK, Wolfgang; Deutsche Thomson-Brandt GmbH, Licensing & Intellectual Property, Karl-Wiechert-Allee 74, D-30625 Hannover (DE).			

REF. 7	RCA 89,817
CORRESP. US/UT:	
COUNTRY	PCT

(54) Title: METHOD FOR ADDRESSING A BITSTREAM RECORDING

(57) Abstract

In bitstream recording presentation data is organised into Video Object Units. These have a variable size but have also a variable duration. To allow access to any Video Object Unit in the bitstream a housekeeping address table is used which is based on pieces (VOBU#n) of the bitstream of constant size per piece. The address table additionally contains for each of these pieces a specific delta duration ($\Delta \text{DUR}\#n$) which indicates the time difference between the arrival time of the first packet of a piece and the arrival time of the packet following immediately the last packet of that piece. The computation of the target VOB address includes the following steps: accumulate the delta durations until the given time value is most closely reached towards the target VOB; the running index of this table entry multiplied by the constant piece size directly results in the address value to be accessed.

DAV →

VOBU#n	$\Delta \text{DUR}\#n$
VOBU#i	$\Delta \text{DUR}\#i$
VOBU#3	$\Delta \text{DUR}\#3$
VOBU#2	$\Delta \text{DUR}\#2$
VOBU#1	$\Delta \text{DUR}\#1$

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD FOR ADDRESSING A BITSTREAM RECORDING

5

The invention relates to a method and to an apparatus for addressing a bitstream to be recorded or being recorded on a storage medium, e.g. an optical disc.

10

Background

In bitstream recording one is free to subdivide the bitstream into sub-units of more regular structure. Presentation data in DVDs (digital video or versatile disc) is organised into units called Video Object Unit, denoted VOBUs, e.g. in the RTRW Specification for Realtime Rewritable Video DVDs. VOBUs have a variable size (data amount measured in number of sectors), but have also a variable duration (measured in number of video fields).

20

For data retrieval from the disc the RTRW specification foresees a 'VOBU map' which is a table where for every VOBUs in a recording the length in sectors and the duration in fields is entered.

25

Invention

A table for data retrieval from a storage medium can be based on bitstream data being subdivided into pieces of constant duration. 'Duration' means the difference between the arrival time of the first packet of a piece and the arrival time of the packet following immediately the last packet of that piece.

35

'Housekeeping' in the general context of either RTRW recording or Stream recording is the task to translate a given time value (presentation time in case of RTRW recording or packet arrival time in case of Stream recording) into a disc address value where the desired data can be found.

In such systems the VOB map or 'housekeeping address table', denoted HAT, can contain a specific size or a specific offset or a specific delta size or, in general, a specific address-like quantity for each of these constant-duration
5 pieces. By storing delta values instead of the total duration at a current VOB these entries can be described with shorter word length which helps to keep the total VOB map in a reasonable size.

A possible type of housekeeping process for these systems
10 could include the following steps:

- By division and truncation, calculate from the given time value the index of the table entry to be looked up.
- The content of the table entry either directly specifies the address value to access, or all table entries up to
15 that index have to be accumulated to get the address value to be accessed.

The big disadvantage of such type of HAT which is based on constant-duration pieces lies in the following:

- 20 - In case of a low bitrate recording the pieces of constant duration will be small in size, i.e. every piece will comprise a few data sectors only or, in the extreme, a fraction of a data sector only. The disc can contain enormous numbers of those pieces, so that the HAT may become too big to be kept in the memory.
- 25 - In case of high bitrate recording, the pieces of constant duration are big in size, i.e. each piece will comprise many data sectors. Then, addressing one piece or another corresponds to a very coarse addressing on the (sector)
30 scale, i.e. a piece address derived from the HAT can be located many sectors away from the currently desired location.

Therefore housekeeping based on constant-duration pieces can result in a too big HAT in some cases (up to one half of the disc capacity), and can result in too coarse addressing in
35 other cases.

It is one object of the invention to disclose a method for assigning to a given time value a storage medium address value which method avoids such disadvantages. This object is achieved by the method disclosed in claim 1.

5

According to the invention the housekeeping address table HAT is based on pieces of constant length or size, i.e. a constant number of bits per piece.

10 In a medium like DVD-RAM where data are physically organised into 'ECC blocks' (ECC: error correction code) of 32kByte length each, particular advantages result if the above constant size or a multiple of it is used as the constant size of a piece. However, any other constant size can be used. In this case of pieces of constant size the HAT contains for
15 each of these pieces of constant size a specific absolute duration or, preferably, a specific delta duration which indicates the arrival time difference between the last and the first packet contained in a piece.

The housekeeping process, i.e. the computation of the target
20 VOB address includes the following steps:

- Accumulate the delta durations contained in the HAT until the given time value is most closely reached towards the target VOB, i.e. until the sum of delta durations is less than or equal to the given time value assuming that
25 forward scanning of the VOB entries is performed, or until the sum of delta durations is greater than or equal to the given time value assuming that backward scanning of the VOB entries is performed.
- The running index of this table entry multiplied by the
30 constant piece size directly results in the address value to be accessed.

The advantages of the inventive constant-size based HAT are:

- the HAT size does not depend on the bitrate of the re-
35 cordings,
- the HAT addressing accuracy is constant, the granularity

basically corresponds to the 'piece size constant' which can be chosen as appropriate to be constant for all types of discs, to be constant per disc, or to be constant per recording on a specific disc.

5

In principle, the inventive method is suited for addressing a bitstream to be recorded or being recorded on a storage medium, e.g. a DVD recorder, wherein an address table is used that is based on pieces of said bitstream, and wherein:

- 10 - said pieces each include a constant amount of bits of said bitstream;
- to each address table entry for said pieces an absolute time duration or a delta time duration is assigned in said address table using a running index;
- 15 - in case of absolute time duration values storage:
in order to get an address value for reaching a target address the nearest corresponding absolute time duration entry of said address table is selected and the corresponding running index becomes multiplied by said constant amount in order to compute said address value, or,
- 20 - in case of delta time duration values storage:
in order to get an address value for reaching a target address all delta time durations up to the nearest time duration corresponding to said address value become accumulated and the running index corresponding to the delta
- 25 time duration entry related to said nearest time duration becomes multiplied by said constant amount in order to compute said address value.

- 30 Advantageous additional embodiments of the inventive method are disclosed in the respective dependent claims.

Drawings

35

Embodiments of the invention are described with reference to

the accompanying drawings, which show in:

Fig. 1 simplified overall system for DVD Stream Recording;

Fig. 2 basic directory and file structure;

Fig. 3 navigation data structure;

5 Fig. 4 stream pack;

Fig. 5 inventive housekeeping address table;

Fig. 6 Stream Time Map Information;

Fig. 7 mapping list example.

10

Exemplary embodiments

The DVD Stream Recording system is designed to use rewritable DVD discs for recording existing digital bitstreams, editing them and playing them back as bitstreams.

15 The following abbreviations are used:

LB: Logical Block, RBN: relative byte number, RBP: relative byte position, RLBN: relative logical block number, STB: set top box, TOC: table of content, SCR: system clock reference.

20

This system is designed to satisfy the following requirements:

Any packet size is supported as long as it is less than 2kByte and of constant length within a take.

25 A timing mechanism, ~~i.e. a time stamp is added to every~~ broadcast packet to enable proper packet delivery during playback.

To enlarge the fields of applications, non-real-time recording should be possible. However, in this case the STB has to generate the Time Stamp information.

30 Data allocation strategy and file support real-time stream recording.

Many digital services require Service Information which normally is embedded in the real-time stream. To support a STB fed by data from a DVD player, the DVD should provide additional space, which can be used by the STB to duplicate part

35

of the service information and to add additional TOC information.

Copy Protection must be supported. In addition, any scrambling performed by the service provider or the STB must be
5 kept unchanged.

User requirements can be grouped into requirements for recording, requirements for playback, and requirements for editing:

Real-time Recording

10 The system should be designed to enable real-time recording of digital streams. It also should allow the user to concatenate recordings, even if those recordings consist of different stream formats. If recordings are concatenated, a seamless or close to seamless playback possibility would be
15 nice but is not required.

Navigation Support

To support navigation two pieces of information (lists) should be generated during recording:

20 1) An 'original' version of a play list. This list contains quite low level information, e.g. time map or (broadcast) packet order of the recording. This list is accessible by the STB and the content is understood by the DVD streamer as well as by the STB. In its original version the playlist enables the playback of a complete recording. The playlist may
25 be accessed and extended after recording by the STB to allow more sophisticated playback sequences.

2) The second piece of information, a mapping list, is generated to support the stream recorder to retrieve packet
30 stream chunks (cells), that are described in terms of the application domain, e.g. 'broadcast packets' or 'time'. This list is owned and understood by the DVD streamer only.

Content Description

35 The system should reserve space which can be used by the STB to store high level TOC and Service Information. This infor-

mation is provided for the user to navigate through the content stored on disc and may contain sophisticated GUI information. The content needs not to be understood by the stream recorder. However a common subset of the TOC information, 5 e.g. based on a character string, may be useful to be shared between STB and DVD, in order to enable the stream recorder to provide a basic menu by itself.

10 Playback of individual recording and playing all recordings sequentially should be possible via play list.

Player menus for entry point selection

The STB can generate a sophisticated menu based on the TOC information stored on the disc. However, it should be possible 15 to generate a simple menu by the streamer itself, e.g. via some 'character' information which is shared by STB and DVD.

Trick play modes

20 The STB should be able to steer trick play via the 'play list'. Due to the nature of the broadcast stream, the trick play features may be limited to basic ones, e.g. Time Search and Title Jump.

User defined playback sequence features like programming or 25 parental control can be supported via the play list

The DVD streamer should create the 'original version' of the play list. It also should allow extensions and modifications of the play list by the STB for more sophisticated playback 30 features. The DVD streamer is not responsible for the content of those sophisticated playlist(s).

The system must support the deletion of single recordings on user's request. If possible, the system should allow this 35 feature under the control of the STB.
The system may support insert editing.

In the simplified overall system of Fig. 1 an application device AD interacts via an interface IF, e.g. an IEEE1394 interface, with a streamer device STRD, i.e. a DVD recorder. A streamer STR within STRD sends its data via output buffering & timestamping handling means BTHO to IF and receives from IF data via input buffering & timestamping handling means BTHI. AD sends its data via output buffering & timestamping handling means BTHOAD to IF and receives from IF data via input buffering & timestamping handling means BTHIAD.

Concerning the directory and file structure, the organisation of Stream Data and Navigation Data of DVD Stream Recording is done in a specific way such as to take into account the following:

- Any DVD Streamer device STRD has certain requirements to store its own housekeeping data or Streamer-specific navigation data on the disc. These data are solely for helping the retrieval of recorded data; they need not be understood or even be visible to any outside application device AD.
- Any DVD Streamer device STRD needs to communicate with the application device AD it is connected to. This communication should be as universal as possible so that the maximum possible range of applications can be connected to the Streamer. The Navigation Data to support such communication are called Common navigation data and must be understandable by the Streamer as well as by the application device.
- The Streamer device STRD should offer to the connected application device AD a means for storing its own private data of any desired kind. The Streamer needs not to understand any of the content, internal structure, or meaning of this Application-specific navigation data.

Fig. 2 illustrates a possible directory and file structure

where all the data comprising the disc content are. The files storing the disc content are placed under the STRREC directory which is under the root directory. Under the STRREC directory the following files are created:

5 - COMMON.IFO

Basic information to describe the stream content. Needs to be understood by the Application Device as well as the Streamer.

- STREAMER.IFO

10 Private housekeeping information specific to the Streamer Device. Needs not to be understood by the Application Device.

- APPLICAT.IFO

15 Application Private Data, i.e. information that is specific to the Application(s) connected to the Streamer. Needs not to be understood by the Streamer.

- REALTIME.SOB

Recorded real-time stream data proper.

Note that except for the files described above, the STRREC
20 directory shall not contain any other files or directories.

Concerning the navigation data structure, Navigation data is provided to control the recording, playing back, and editing of any bitstreams that are recorded. As shown in Fig. 3,
25 Navigation Data includes Stream Management Information (SMI) as contained in the file named COMMON.IFO and Housekeeping Information (HKPI) as contained in the file named STREAMER.IFO. From the point of view of the Streamer Device, these two kinds of information are sufficient to perform all
30 necessary operations.

In addition to these, DVD Stream Recording also foresees the possibility of reserving a storage location for Application Private Data (APD), which may in general also be considered as Navigation Data.

35 SMI and HKPI are the Navigation Data which are directly relevant for the Streamer operation. SMI includes three kinds of information tables, namely Stream Manager General

Information (SM_GI), Stream Title Table (STT), and Stream Playlist Table (SPLT), in this order. HKPI includes two kinds of information tables, namely Housekeeping General Information (HKP_GI) and Housekeeping Address Table (HAT), in this order.

There is no restriction in Stream Recording that each table within Navigation Information must be aligned with a sector boundary.

SM_GI includes information items like end address of SMI, end address of SM_GI, start address of STT and start address of SPLT.

STT includes information items like Number of Stream Titles, End Address of Stream Title Table, Application Packet Size, Service ID, Application Device ID, Stream Duration, Stream Name Search Pointer, Stream Title Names (STN).

SPLT includes information items like Number of Playlists, End address of SPLT, Start Addresses of Playlist Information, Number of Playlist Entries, Index of Stream Title, Start SCR, and End SCR.

Housekeeping General Information (HKP_GI) includes information items like Number of Housekeeping Address Entries (HAE_Ns), End address of HKPI (HKPI_EA) and Time Scale Factor (HKP_TSCAL).

HAE_Ns describes the number of housekeeping address entries contained in this HKPI. HKPI_EA describes the End Address of this HKPI. HKP_TSCAL describes the time scaling used within this HKPI.

The purpose of the inventive Housekeeping Address Table (HAT) is to provide all necessary information so that given playlist entries are efficiently translated into disc address pairs, and viceversa.

It is also possible to include Application Private Data which consist of three kinds of information, namely Applica-

tion Private Data General Information, a set of one or more Application Private Data Search Pointers, and a set of one or more Application Private Data Area. If any Application Private Data exists, these three kinds of information become
5 recorded and stored in this order in the APPLICAT.IFO file.

Stream Data include one or more 'Stream Objects' (SOBs) which each can be stored as a 'Program stream' as described
10 in ISO/IEC 13818-1, Systems.
A SOB can be terminated by a program_end_code. The value of the SCR field in the first pack of each SOB may be non-zero. A SOB contains the Stream Data packed into a sequence of 'Stream Packs' (S_PCKs). Stream data can be organised as one
15 elementary stream and are carried in PES packets with a stream_id.

As shown in Fig. 4 a Stream Pack includes a pack header, eventually followed by a system header, and followed by one
20 Stream Packet (S_PKT). A system header may be included in those S_PCKs which are the first S_PCK of a SOB. When a system header is included, the length of the remaining Stream Pack content is 2010 bytes, when it is not included, the length of Stream Pack content is 2034 bytes.

25 A stream Object is composed of one or more Stream Packs.

The HAT table depicted in Fig. 5 contains for each piece or VOB (VOB#1 to VOB#n) of the bitstream to be recorded or
30 of the recorded bitstream a corresponding absolute or delta time duration entry $\Delta\text{DUR}\#1$ to $\Delta\text{DUR}\#n$. DAC denotes a desired address or target address in the bitstream. VOB#1 to VOB#n each concern a constant number of bits of the bitstream.

35 The HAT table can have the format of a Stream Time Map Information STMAPI and may include two sub-units: "Stream Time

Map General Information" STMAP_GI and one "Mapping List"

MAPL. A possible content of STMAPI is shown in Fig. 6.

MAPU_SZ describes the size in sectors of the mapping list units. A Mapping Unit Size of e.g. 16 sectors means that the
 5 first Mapping List Entry relates to the application packets contained in the first 16 sectors of the Stream, the second Mapping List Entry relates to the application packets contained in the next 16 sectors, and so on.

MTU_SHFT describes the weight of the LSB of the mapping list
 10 entries, relative to the bits of the Packet Arrival Time (PAT) Describing Format. MTU_SHFT describes a value between 16 and 36. A value of e.g. "16" means that the LSB of Incremental Application Packet Arrival Time IAPAT has the same weight as PAT_base[0], whereby PAT_base[x] means a PAT base
 15 value measured by 90kHz units.

MTU_SHFT depends on MAPU_SZ. MTU_SHFT fulfils the rules:

$$0 \leq 5625 \cdot 2^{34} \cdot \frac{MAPU_SZ}{2^{MTU_SHFT} \cdot max_bitrate} - 1 < 1$$

and

$$16 \leq MTU_SHFT \leq 36$$

20 wherein

max_bitrate = maximum bitrate of the MPEG-2 Program Stream.

MAPL_ENT_Ns describes the number of Mapping List Entries to follow after STMAP_GI.

25 S_S_APAT describes the start Application Packet Arrival Time of the Stream, i.e. the packet arrival time of the first packet belonging to the Stream.

S_E_APAT describes the end Application Packet Arrival Time of the Stream, i.e. the packet arrival time of the last
 30 packet belonging to the Stream.

The Mapping List MAPL consists of zero or more "Incremental Application Packet Arrival Times" IAPAT. IAPAT describes the Incremental Application Packet Arrival Time of the corre-

sponding Mapping Unit in DVD Stream Recording's Incremental PAT Describing Format defined in the following:

Let $MAPU_S_APAT(i)$, $1 \leq i \leq MAPL_ENT_Ns$, be the start Application Packet Arrival Time of the Mapping Unit #i, i.e. the packet arrival time of the first packet belonging to the Mapping Unit #i; let $MAPU_E_APAT(i)$ be the last Application Packet Arrival Time of the Mapping Unit #i, i.e. the packet arrival time of the last packet belonging to the Mapping Unit #i and let $IAPAT(i)$ be the i-th IAPAT entry of the Mapping List, i.e. $IAPAT(1)$ is the first entry of the Mapping List. Then $IAPAT(i)$ shall fulfil the rules:

$$0 \leq \left[\sum_{k=1}^i IAPAT(k) \right] - \frac{MAPU_S_APAT(i+1)}{2^{MTU_SHFT}} < 1$$

for $i = 1, 2, \dots, MAPL_ENT_Ns-1$,

and

$$0 < \left[\sum_{k=1}^i IAPAT(k) \right] - \frac{MAPU_E_APAT(i)}{2^{MTU_SHFT}} \leq 1$$

for $i = MAPL_ENT_Ns$,

and

$$0 \leq IAPAT(i) < 2^{12}$$

for $i = 1, 2, \dots, MAPL_ENT_Ns$.

Fig. 7 shows an example of the order of MAPU, MAPU_S_APAT, MAPU_E_APAT and IAPAT. The lower side of the t-axis is divided in IAPAT Time Units and the upper side of the t-axis in the MAPUs.

MAPU_S_APAT(i) and MAPU_E_APAT(i) are described in the DVD Stream Recording's PAT Describing Format. For the comparison in the equation above MAPU_S_APAT(i) and MAPU_E_APAT(i) are treated as e.g. 6 byte unsigned integer values.

The duration of IAPAT = 1 is the

$$\text{Time Unit of IAPAT} = \frac{2^{MTU_SHFT}}{5625 \cdot 2^{20}} \text{ seconds.}$$

- In Stream recording, the application performs its own padding, so that the pack length adjustment methods of DVD-ROM Video or RTRW need not to be used. In Stream recording it is safe to assume, that the Stream packets will always have the
- 5 necessary length.
- The data stream also contains time stamps, e.g. within the data packets.

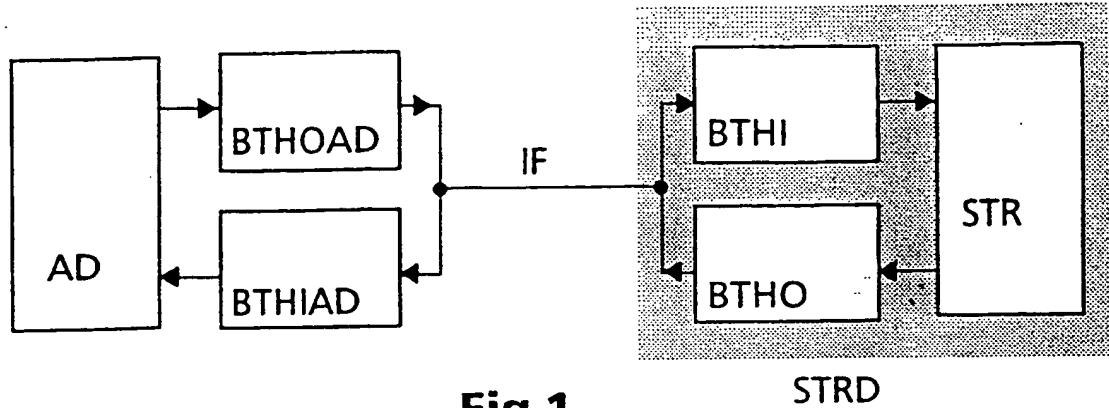
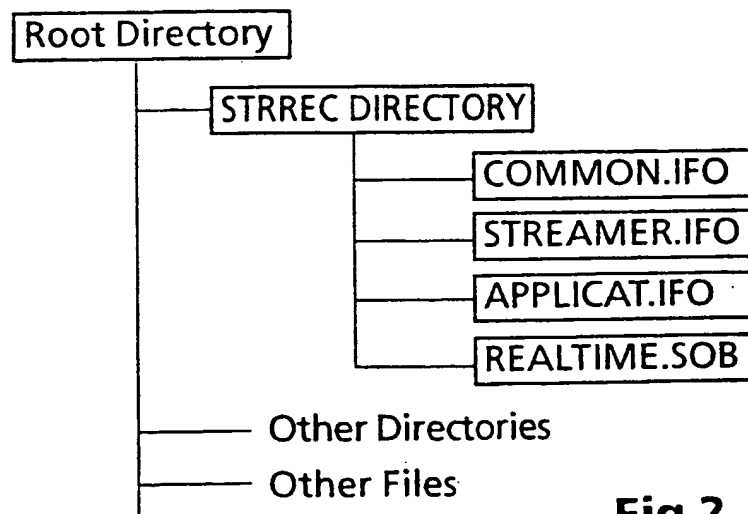
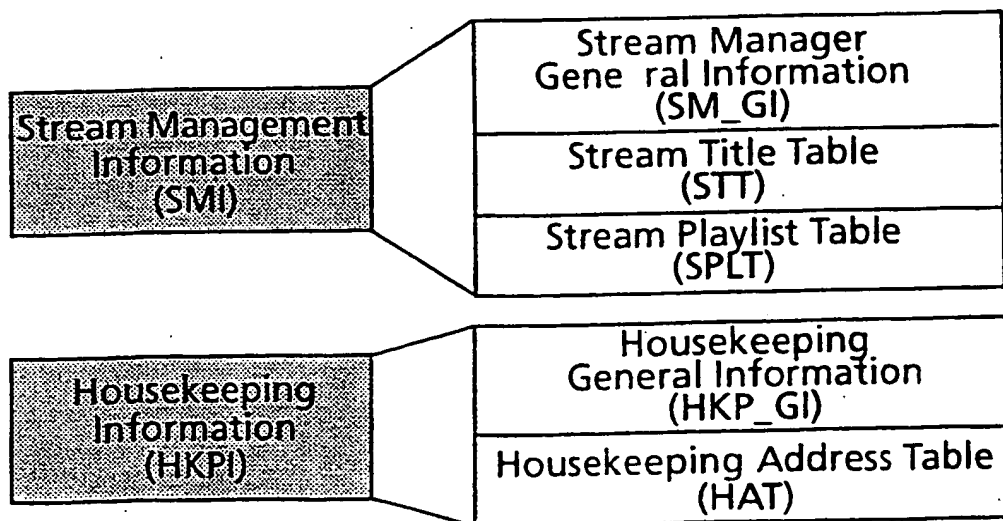
Claims

- 5 1. Method for addressing a bitstream to be recorded or being recorded on a storage medium (STRD), wherein an address table (HAT) is used that is based on pieces (VOBU#n) of said bitstream, characterised by:
- 10 - said pieces (VOBU#n) each include a constant amount of bits of said bitstream;
 - to each address table entry for said pieces an absolute time duration or a delta time duration (Δ DUR#n) is assigned in said address table using a running index (1, 2, 3, ..., n);
 - 15 - in case of absolute time duration values storage: in order to get an address value for reaching a target address (DAV) the nearest corresponding absolute time duration entry (Δ DUR#i) of said address table (HAT) is selected and the corresponding running index (i) becomes multiplied by said constant amount in order to compute
20 said address value, or,
 - in case of delta time duration values storage: in order to get an address value for reaching a target address (DAV) all delta time durations (Δ DUR#1, ...
25 Δ DUR#i) up to the nearest time duration value corresponding to said address value become accumulated and the running index (i) corresponding to the delta time duration entry (Δ DUR#i) related to said nearest time duration value becomes multiplied by said constant amount in order
30 to compute said address value.
2. Method according to claim 1, wherein said storage medium (STRD) is a Streamer device or a DVD recorder.
- 35 3. Method according to claim 1 or 2, wherein said pieces (VOBU#n) of said bitstream contain data packets and a delta time duration value which is the difference between

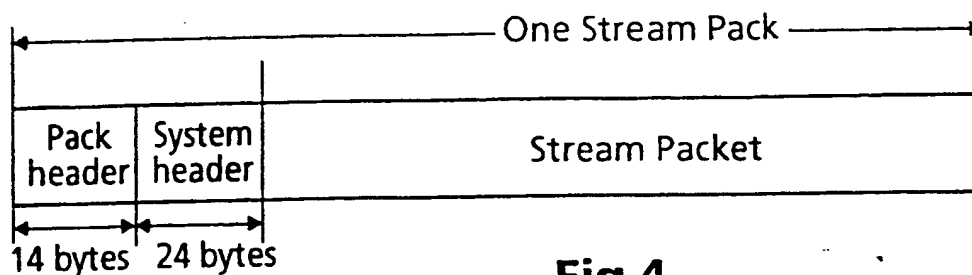
the arrival time of the first packet of a piece and the
arrival time of the packet following immediately the last
5 data packet of that piece.

4. Method according to any of claims 1 to 3, wherein the
size of a piece corresponds to the number of bits of an
ECC block or a multiple thereof.

1/3

**Fig.1****Fig.2****Fig.3**

2/3

**Fig.4**

	VOBU#n	Δ DUR#n
DAV →	VOBU#i	Δ DUR#i
	VOBU#3	Δ DUR#3
	VOBU#2	Δ DUR#2
	VOBU#1	Δ DUR#1

Fig.5

	Contents	Number of Bytes
(1) MAPU_SZ	Mapping Unit Size	2
(2) MTU_SHFT	Mapping Time Unit Shift	1
(3) reserved	reserved	1
(4) MAPL_ENT_Ns	Number of Mapping List Entries	4
(5) S_S_APAT	Stream Start APAT	8
(6) S_E_APAT	Stream End APAT	8
	Total	24

Fig.6

3/3

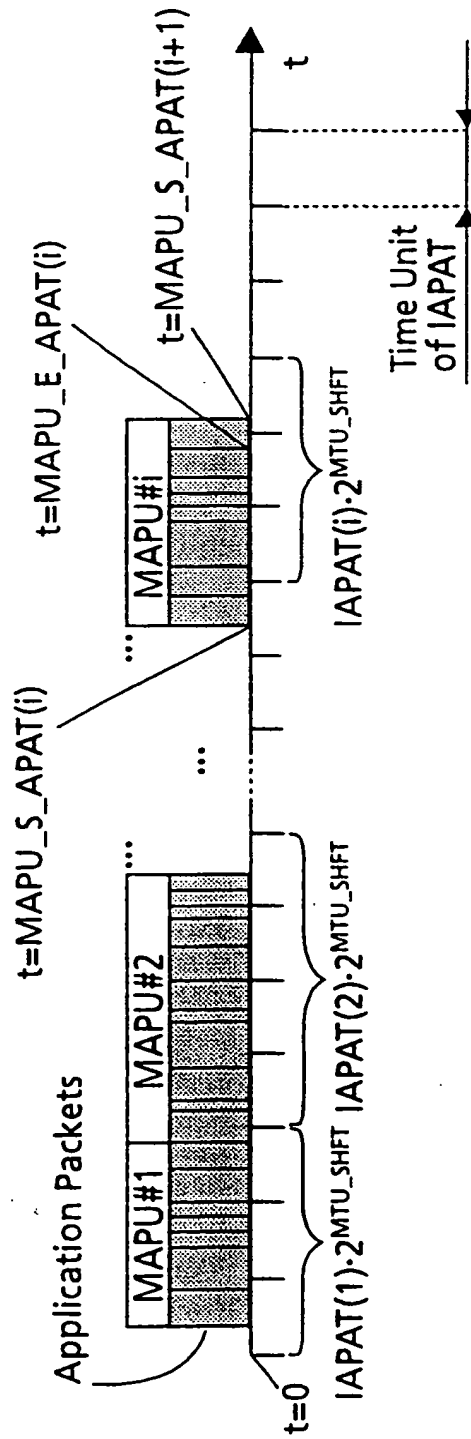


Fig.7

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 99/06254

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G11B27/32 G11B20/12 G11B27/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 797 204 A (PIONEER ELECTRONIC CORP) 24 September 1997 (1997-09-24) page 2, line 28 -page 3, line 4; figure 5 page 12, line 25-42 page 18, line 31-49 ---	1,2,4
Y	FR 2 759 471 A (SONY CORP) 14 August 1998 (1998-08-14) page 21, line 21 -page 25, line 12 page 11, line 22 -page 12, line 25 ---	1,2
Y	---	4
A	EP 0 729 153 A (HITACHI LTD) 28 August 1996 (1996-08-28) column 3, line 45 -column 4, line 13; figure 2 --- -/--	1,2

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

*** Special categories of cited documents :**

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "*" document member of the same patent family

Date of the actual completion of the international search

13 December 1999

Date of mailing of the international search report

21/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 apo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mourik, J

INTERNATIONAL SEARCH REPORT

Int'l Application No.

PCT/EP 99/06254

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 673 034 A (SONY CORP) 20 September 1995 (1995-09-20) page 25, line 13 -page 28, line 4; figures 34-40	1,2
A	US 5 630 005 A (ORT JEFFREY) 13 May 1997 (1997-05-13) claim 1	1,2

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 99/06254

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0797204	A	24-09-1997	JP 9251763 A	22-09-1997
FR 2759471	A	14-08-1998	JP 10222316 A	21-08-1998
EP 0729153	A	28-08-1996	JP 8235833 A	13-09-1996
			CN 1135072 A	06-11-1996
			CN 1229235 A	22-09-1999
			EP 0930618 A	21-07-1999
EP 0673034	A	20-09-1995	AU 681259 B	21-08-1997
			AU 1824595 A	18-09-1995
			BR 9505853 A	21-02-1996
			CA 2160913 A	08-09-1995
			CN 1115076 A	17-01-1996
			CN 1124062 A	05-06-1996
			EP 0696799 A	14-02-1996
			JP 7311950 A	28-11-1995
			WO 9524037 A	08-09-1995
			PL 311310 A	05-02-1996
			SG 24104 A	10-02-1996
			US 5734787 A	31-03-1998
			US 5592450 A	07-01-1997
			US 5596565 A	21-01-1997
			US 5745505 A	28-04-1998
US 5630005	A	13-05-1997	NONE	